
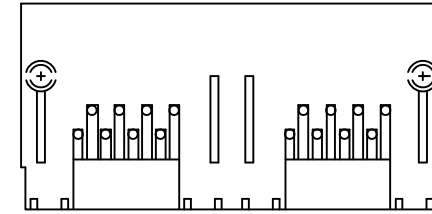
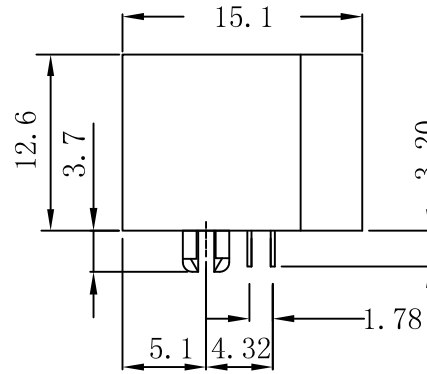


Mechanical:

REW.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		23/07/2009	

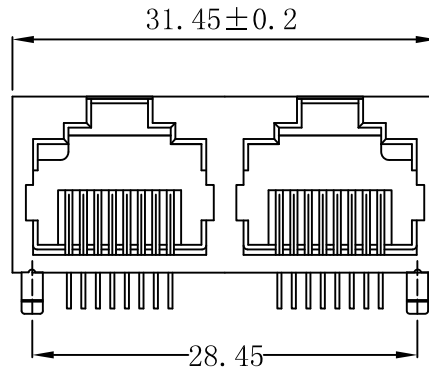

NOTES:

Electrical:


- 1. Voltage rating : 125 VAC RMS
- 2. Current Rating : 1.5 AMP
- 3. Contact resistance : 20 mΩ Max
- 4. Insulation resistance : 500 MΩ Min @500V DC
- 5. Dielectric strength : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- 1. Housing & Insert Material : PBT UL94V-0.
- 2. Contact Material : Diameter 0.46mm Phosphor Bronze
Gold Plating Over Nickel.
- 3. Operating Life : 750 Cycles Min.

ENVIRONMENTAL:

- 1. Storage : -40°C ~ +85°C
- 2. Operation : -40°C ~ +85°C.
- 3. Wave solder temperature : 265°C Max, 5 Sec.

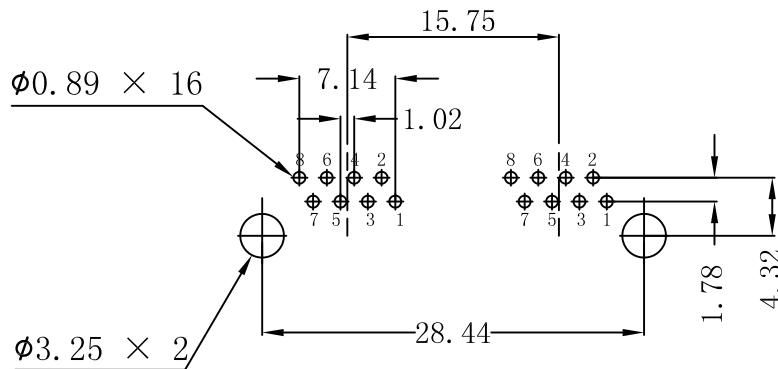

PC Board Layout (Top View)
Component Side Shown



X:X	± 0.30	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX	± 0.25	CHKD:	
X:XXX	± 0.05	DR: TOM	TITLE: SIDE ENTRY PCB JACK
ANGLES	$\pm 1^\circ$	UNIT: mm	PART NO.: LPJE201NNL
	SCALE: 1/1	SHEET: 1/1	REV: A DWG NO.: LP09072318